

TCXO 2TG2600001	Product Specification	Produced date / Rev. Revised date	2020.10.30 / S2 2022.03.07 / S3
--------------------	------------------------------	--------------------------------------	------------------------------------

Product Specification

TCXO

Customer	-
Model	2TG2600001
Size	2520
Frequency	26.000000MHz
Type	TCXO
Vcc	+1.7V ~ +3.3V
Vcont	N/A
AFC Range	N/A
Temp.	$\pm 0.5\text{ppm max.}@-30 \sim +85^{\circ}\text{C}$, $\pm 3.0\text{ppm max.}@-40 \sim -30^{\circ}\text{C}$,
Slope	$\pm 0.05\text{ppm}/^{\circ}\text{C max.}@-20 \sim +65^{\circ}\text{C}$ $\pm 0.1\text{ppm}/^{\circ}\text{C max.}@-30 \sim +85^{\circ}\text{C}$, $\pm 0.35\text{ppm}/^{\circ}\text{C max.}@-40 \sim -30^{\circ}\text{C}$
Initial Frequency	$\pm 2.0\text{ppm max. (After 2times reflow)}$

Issued Date	2020.05.20
Revised Date	2022.03.07
Prepared part	R&D
Drawn	Han Shuang
Checked	Kuro Peng
Approved	Jay

TCXO 2TG2600001	Product Specification	Produced date / Rev. Revised date	2020.10.30 / S2 2022.03.07 / S3
--------------------	------------------------------	--------------------------------------	------------------------------------

1. Electrical Characteristics

Parameter		Value	Conditions
Frequency		26.000000MHz	
Supply Voltage(Vcc)		+1.8±5% ,+2.8V±5%,+3.0±5%	
Output Load		10kohm//10pF±10%	
Control Voltage(Vcont)		N/A	
Output Level		0.8Vp-p min.	Clipped sine wave (DC-coupled)
Current		1.5mA max.	10koms//10pF±10%
Duty Cycle		50±5%	
Operating Temperature Range		-40~+85°C	
Storage Temperature Range		-40~+85°C	
Initial Frequency Tolerance		±2.0ppm max.	After 2times reflow
Frequency Stability	vs. Temperature (-30 ~ +85°C)	±0.5ppm max.	Referenced to +25°C frequency
	vs. Temperature (-40 ~ -30°C)	±3.0ppm max.	
	vs. Supply Voltage	±0.2ppm max.	Vcc±5%
	vs. Load	±0.2ppm max.	10koms//10pF±10% each
	vs. Aging	±1.0ppm max.	1 st Year
Frequency Slope	vs. Temperature (-20 ~ +65°C)	±0.05ppm/°C max.	Every +2°C
	vs. Temperature (-30 ~ +85°C)	±0.1ppm/°C max.	
	vs. Temperature (-40 ~ -30°C)	±0.35ppm/°C max.	
Start-up Time		2ms max.	More than 90% of final amplitude
ESD		HBM>2000V	JESD22-A114-B
MSL		1 级	IPC/JEDEC J-STD-033C
Phase Noise		-130dBc/Hz max.	1KHz offset


Notes:

- Please leave after reflow in 2h or more at room ambient


<p>TCXO 2TG2600001</p>	<p>Product Specification</p>	<p>Produced date / Rev. Revised date</p>	<p>2020.10.30 / S2 2022.03.07 / S3</p>
----------------------------	-------------------------------------	--	--

2. Outline Specification

Unit: mm

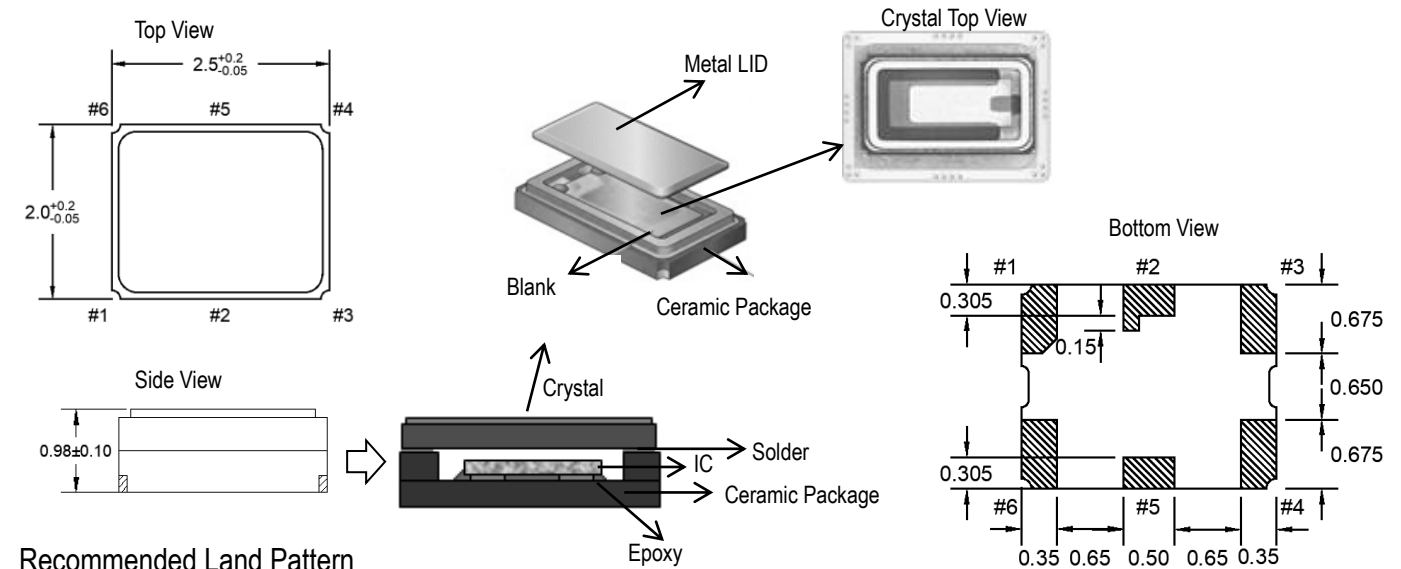


Recommended Land Pattern

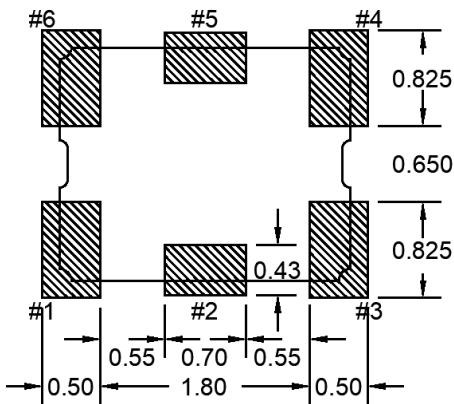

Pad No.	Connection	
	TCXO	VC-TCXO
#1	GND	Vcont
#3	GND	GND
#4	Output	Output
#6	Vcc	Vcc
#2,#5	N.C.	N.C.

Measurement Circuit

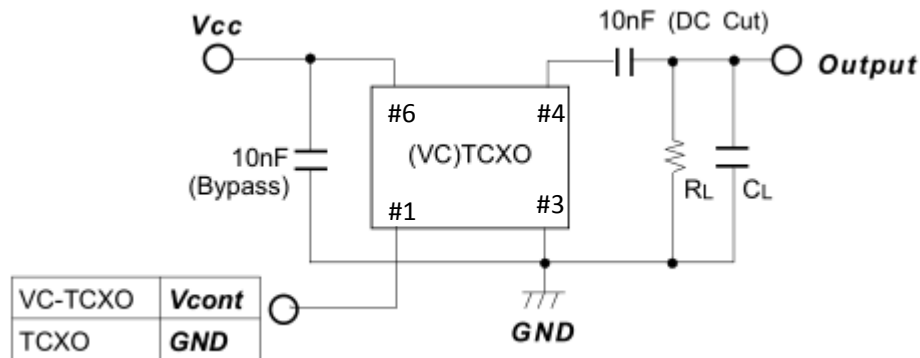


Notes:

- Please connect a bypass capacitor closely to Vcc Pad.
- Load capacitance (CL) includes probe and test board capacitance.

TCXO 2TG2600001	<h1>Product Specification</h1>	Produced date / Rev. Revised date	2020.10.30 / S2 2022.03.07 / S3
--------------------	--------------------------------	--------------------------------------	------------------------------------

3. Marking Specification

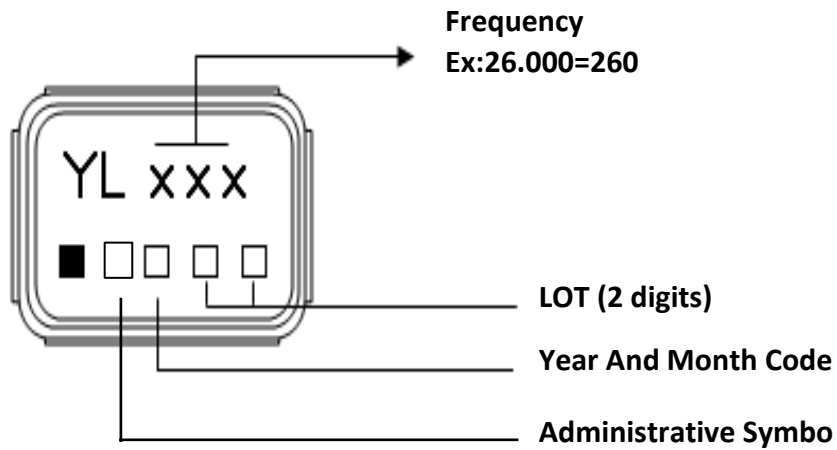


		month											
		JAN	FEB	MAR	APR	MAY	JUN	JUL	AUG	SEP	OCT	NOV	DEC
year	2017	A	B	C	D	E	F	G	H	J	K	L	M
	2021	N	P	Q	R	S	T	U	V	W	X	Y	Z
2018	2022	a	b	c	d	e	f	g	h	j	k	l	m
2019	2023	n	p	q	r	s	t	u	v	w	x	y	z
2020	2024												

<p>TCXO 2TG2600001</p>	<p>Product Specification</p>	<p>Produced date / Rev. Revised date</p>	<p>2020.10.30 / S2 2022.03.07 / S3</p>
----------------------------	-------------------------------------	--	--

4. Packing Specifications

Basic Taping Specification

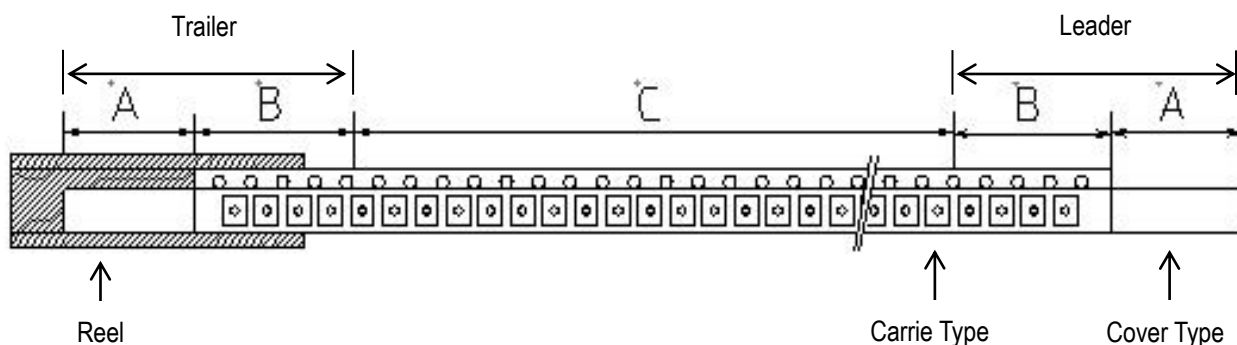


A	Cover tape only	200mm min.
B	Empty carrier tape	300mm min.
C	Component Section	

Notes:

- Insert TCXO product in carrier tape
- Attach cover tape using heat pressing method

Carrier Tape (8mm)

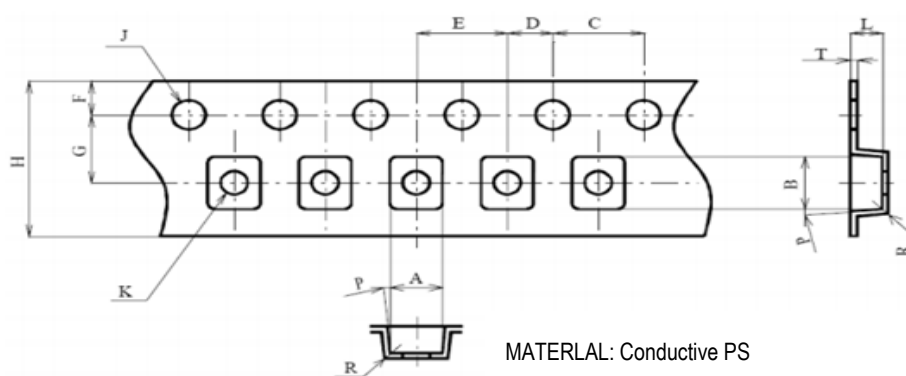


MATERIAL: Conductive PS

Unit: mm

Symbol	A	B	C	D	E	F	G
Dimension	2.3±0.1	2.7±0.1	4.0±0.1	2.0±0.05	4.0±0.1	1.75±0.1	3.5±0.05
Symbol	H	J	K	L	P	T	R
Dimension	8.0±0.2	Φ 1.5+0.1/-0	Φ 1.2±0.1	1.4±0.1	5° max.	0.3±0.05	R0.3 max.

TCXO 2TG2600001	<h1>Product Specification</h1>	Produced date / Rev. Revised date	2020.10.30 / S2 2022.03.07 / S3
----------------------------------	--------------------------------	--------------------------------------	------------------------------------

Reel Taping

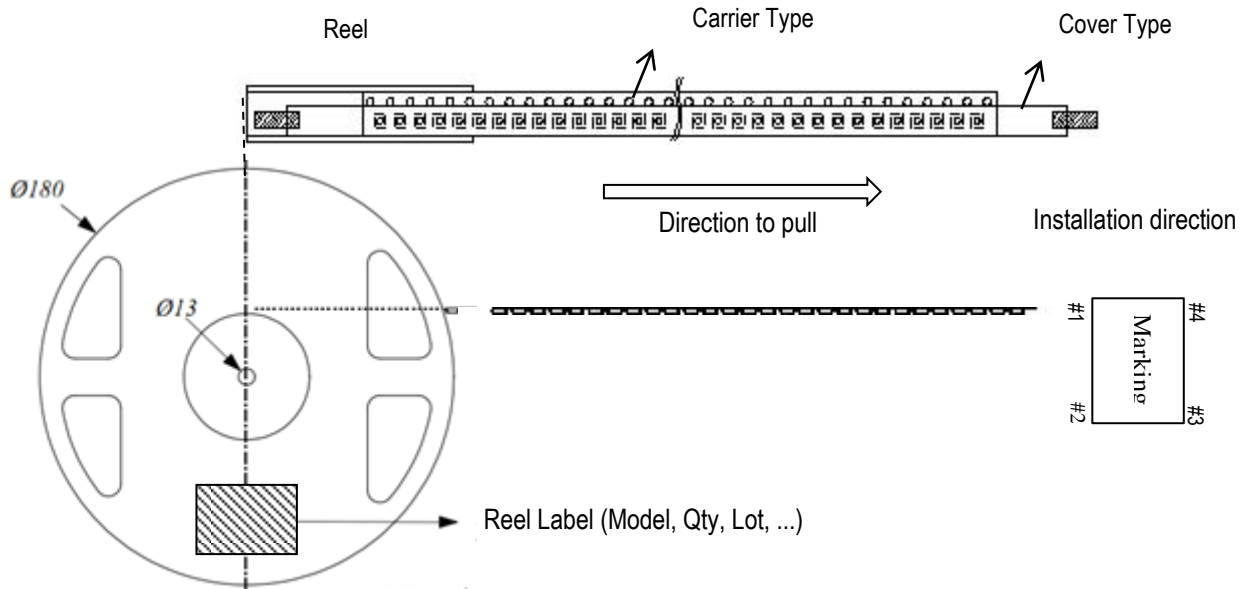

Inner Bag / Inner Box / Outer Box



Inner Bag (1Reel)



HDPE (15 reels enter)



Outer Box (60Reel max.)

pocketful	Outer Box
45Kpcs	180Kpcs

Box Label



TCXO 2TG2600001	Product Specification	Produced date / Rev. Revised date	2020.10.30 / S2 2022.03.07 / S3
--------------------	------------------------------	--------------------------------------	------------------------------------

5. Reliability Specifications


	Test Item	Test Condition	Criteria
1	Preconditioning	125°C 24Hr → 85°C,85%RH 168Hr → 3times reflow It shall be measured after 4Hr to 12Hr at room temperature & humidity	±1.0ppm
2	Drop	Preparation: Test pieces should be fixed on the dummy load with 120~150g weights Condition: Height 150cm onto Iron-plate Drop times: 3 times in 6 mutually perpendicular axes, 1 time random drop total 19 times Condition: Height 120cm onto Iron-plate Drop times: 2 times in 6 mutually perpendicular axes Total drop times: 31 times	±1.0ppm
3	High Temp. & Humidity Storage	85°C,85%RH 240Hr It shall be measured after 4Hr to 12Hr at room temperature & humidity	±1.0ppm
4	Thermal shock	-40°C/30min ↔ 85°C/30min, 100cycles It shall be measured after 4Hr to 12Hr at room temperature & humidity	±1.0ppm
5	Vibration	20~2000Hz, PSD 0.053g ² /Hz, X.Y.Z direction, 15min/direction	±1.0ppm
6	High Temp. Storage	125°C, 240Hr	±1.0ppm
7	Low Temp. Storage	-55°C, 240Hr	±1.0ppm
8	Solderability	Precondition: 105°C, 100%RH, 4Hr Condition: 235±5°C for 3±0.5sec, Solder Pot	90%
9	Solder Heat Resistance	260±5°C, 10±1sec, Solder Pot It shall be measured after 2Hr to 4Hr at room temperature & humidity	±1.0ppm
10	ESD(Electrostatic Discharge) Human Body Model	C = 100pF, V = ±1KV, R = 1.5kohm, 3times	±1.0ppm

*Storage conditions : 18 months

*Constant humidity : 40~70%

TCXO 2TG2600001	<h1>Product Specification</h1>	Produced date / Rev. Revised date	2020.10.30 / S2 2022.03.07 / S3
----------------------------------	--------------------------------	--------------------------------------	------------------------------------

6. Recommended Reflow Profile

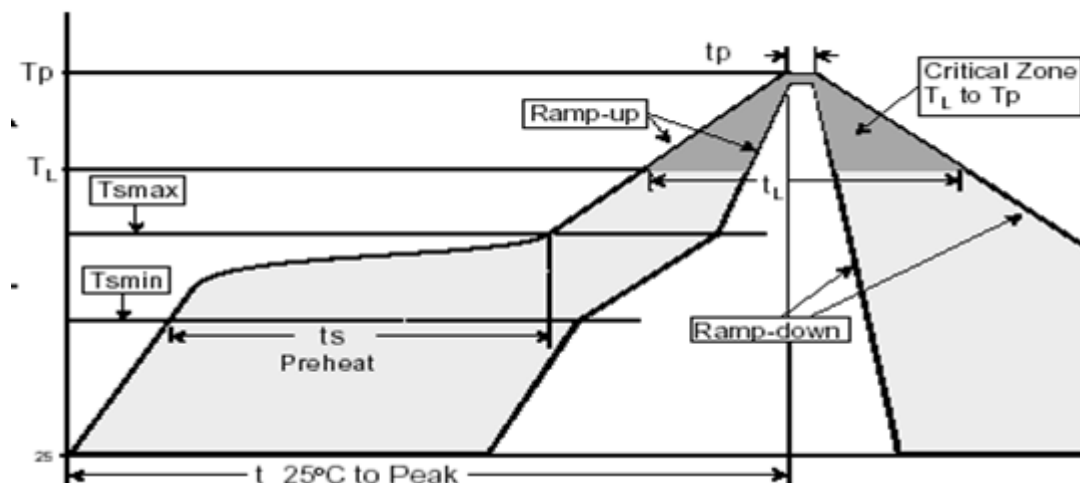

1	Preheat -Temp. Min (Tsmmin) -Temp. Max (Tsmmax) -Time (ts)	150°C 200°C 60~180sec
2	Primary Heat -Temp. (TL) -Time (tL)	220°C 60~150sec
3	Peak -Temp. (Tp) -Time (tp)	260°C 10sec max.