

GENERAL DESCRIPTION

The HP6215 series is a set of three-terminal, low power, high voltage regulators implemented in CMOS technology. The series features extremely low quiescent current which is typically 2.0μA. They allow input voltages as high as 16V. The device provides large current with a significantly small dropout voltage.

The HP6215 consists of a high-precision voltage reference, an error correction circuit, an over temperature protection circuit, and a current limited output driver. They are available with several fixed output voltages ranging from 2.5V to 5.0V. CMOS technology ensures low dropout voltage and low current consumption.

The HP6215 regulators are available in standard SOT89-3L and SOT23-3L packages. Standard products are Pb-free and Halogen-free.


FEATURES

- Input voltage: 3V~16V
- Output range: 2.5V~5.0V
- Output current: 500mA (Within Max Power Dissipation)
- Dropout voltage: 200mV @ $V_{OUT}=3.3V$, $I_{OUT}=100mA$
- Quiescent current: 2μA Typ.
- Good line regulation: 0.01%/V
- Good load regulation: 5mV@1mA ≤ I_O ≤ 50mA
- Low temperature coefficient: 0.07mV/°C
- Soft start

APPLICATIONS

- Battery powered equipment
- Voltage regulator for microprocessor
- Voltage regulator for LAN cards
- Wireless communication equipment
- Audio/Video equipment

TYPICAL APPLICATION CIRCUIT

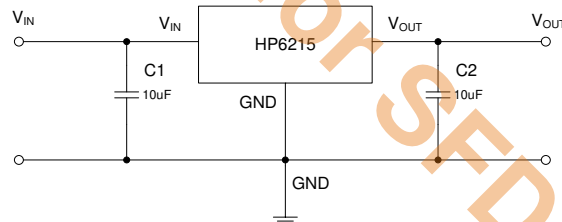


PIN ASSIGNMENT




HP6215T3

SOT89-3L



HP6215S3

SOT23-3L



ORDER INFORMATION

PART NO	PACAKGE	TEMPERATURE	TAPE & REEL
HP6215S3-XX	SOT23-3L	-40 ~ +85°C	3000/REEL
HP6215T3-XX	SOT89-3L	-40 ~ +85°C	1000/REEL

"XX": several fixed output voltages ranging from 2.5V to 5.0V


PART NUMBER RULES

HP6215 [1] - [2]

Code	Description
[1]	Package: S3: SOT23-3L T3: SOT89-3L (B type pin-out)
[2]	Voltage version: XX: several fixed output voltages ranging from 2.5V to 5.0V Example: 33: 3.3V

MARKING DESCRIPTION:

SOT23-3L:



"N": product code, here use "T" stands for "HP6215".


"X": Internal Control Code

"Y": Internal Control Code

"W": The week of manufacturing. "A" stands for week 1, "Z" stands for week 26, "a" stands for week 27, "z" stands for week 52.

"V": Output voltage code.

SOT89-3L:

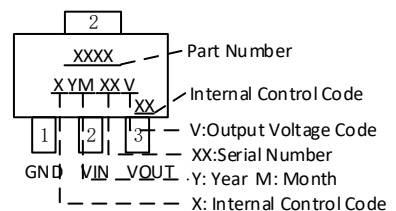

TYPICAL OUTPUT VOLTAGE CODE TABLE

V _{OUT}	CODE	V _{OUT}	CODE
2.8V	M	3.0V	G
3.3V	H	3.6V	I
4.0V	J	5.0V	K

PIN DESCRIPTION

PIN NO		SYMBOL	I/O	DESCRIPTION
HP6215T3	HP6215S3			
1	1	GND	Ground	Ground
2	3	VIN	Power	Input
3	2	VOUT	O	Output

ABSOLUTE MAXIMUM RATINGS (Note)

SYMBOL	ITEMS	VALUE	UNIT
V_{IN}	Input Voltage	-0.3~20	V
V_{OUT}	Output Voltage	-0.3~ V_{IN}	V
P_{DMAX}	Power Dissipation	OTP Limited	W
T_J	Junction Temperature	-40~125	°C
T_{STG}	Storage Temperature	-55 to 150	°C
T_{SOLDER}	Package Lead Soldering Temperature	260°C, 10s	
HBM	Human Body Mode ESD Level	2	KV

Note: Exceed these limits to damage to the device. Exposure to absolute maximum rating conditions may affect device reliability.

RECOMMENDED OPERATING RANGE


SYMBOL	ITEMS		VALUE	UNIT
V _{IN}	VIN Supply Voltage		3 to 16	V
R _{θJA}	Thermal Resistance on PCB	SOT89-3	75	°C/W
		SOT23-3	220	°C/W
T _{OPT}	Operating Temperature		-40 to +85	°C

ELECTRICAL CHARACTERISTICS

The following specifications apply for $V_{OUT}=3.3V$ $T_A=25^{\circ}C$, unless specified otherwise.

SYMBOL	ITEMS	CONDITIONS	MIN	TYP	MAX	UNIT
V_{IN}	Input Voltage		3	5	16	V
V_{OUT}	V_{OUT} Range	$V_{IN} = V_{OUT} + 2V$, $I_{OUT} = 1mA$	$V_{OUT} \times 0.98$	V_{OUT}	$V_{OUT} \times 1.02$	V
I_{OUT}	Output Current	Within Maximum Power Dissipation			500	mA
I_Q	Quiescent Current	No Load		2	3	μA
V_{DROP}	Dropout Voltage	$V_{OUT} = 3.3V$, $I_{OUT} = 100mA$, $\Delta V = 2\%$		200	215	mV
		$V_{OUT} = 5.0V$, $I_{OUT} = 100mA$, $\Delta V = 2\%$		115	130	
ΔV_{LINE}	Line Regulation	$V_{IN} = 5 \sim 12V$, $I_{OUT} = 1mA$		0	6	mV
ΔV_{LOAD}	Load Regulation	$V_{IN} = 12V$, $I_{OUT} = 1 \sim 100mA$		7	36	mV
I_{SHORT}	Short Current	V_{OUT} Short to GND with 3Ω		90	200	mA
$\Delta V_{OUT}/\Delta T_A$	Temperature coefficient	$I_{OUT}=1mA$, $0 \leq T_A \leq 70^{\circ}C$		0.07	0.2	mV/°C
PSRR	Power Supply Rejection Rate	$V_{IN}=5V_{DC}+0.5V_{P-P}$ $F=100Hz$, $I_{OUT}=1mA$		40		dB
T_{SD}	Thermal Shutdown Protection (OTP)	$V_{IN} = V_{OUT} + 2V$, $I_{OUT} = 1mA$	140	160	180	°C
T_{SD_HYS}	OTP Hysteresis			25		°C







SIMPLIFIED BLOCK DIAGRAM

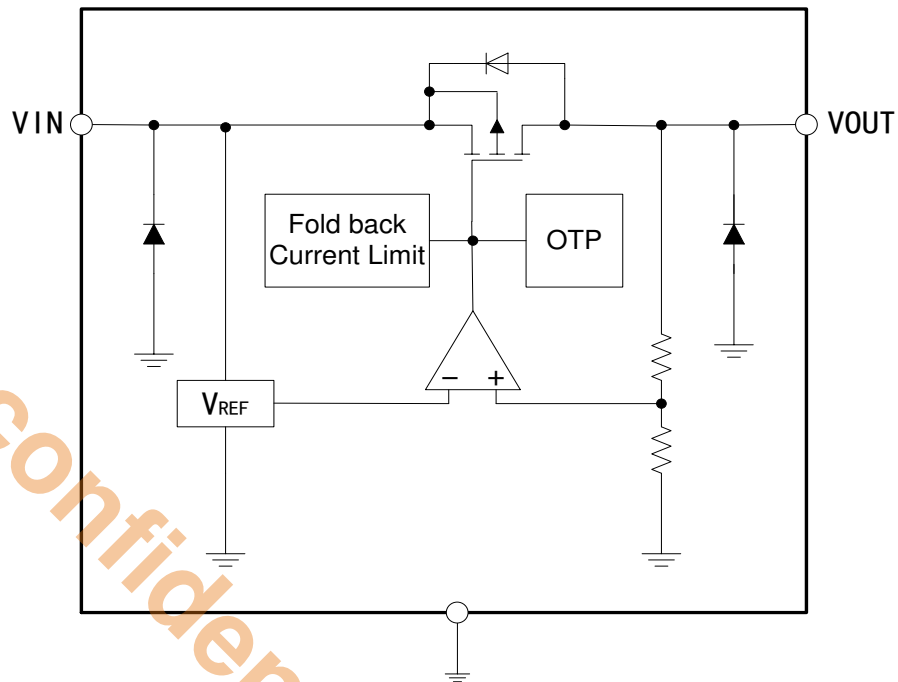

Confidential for SFD only

TYPICAL PERFORMANCE CHARACTERISTICS



$C_{IN}=10\mu F$, $C_{OUT}=10\mu F$, $T_{OPT}=25^{\circ}C$, $V_{IN}=5.3V$, $V_{OUT}=3.3V$, unless specified otherwise. (Package: SOT89-3L)

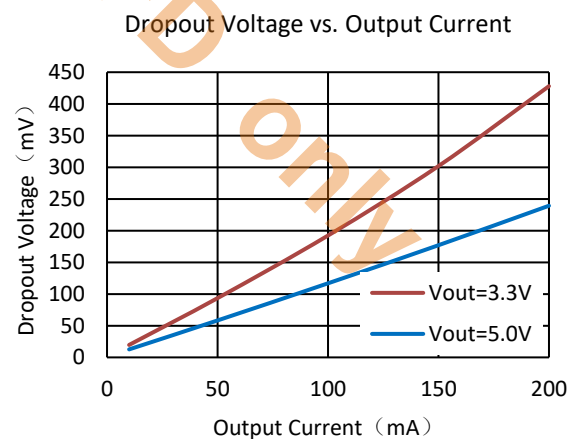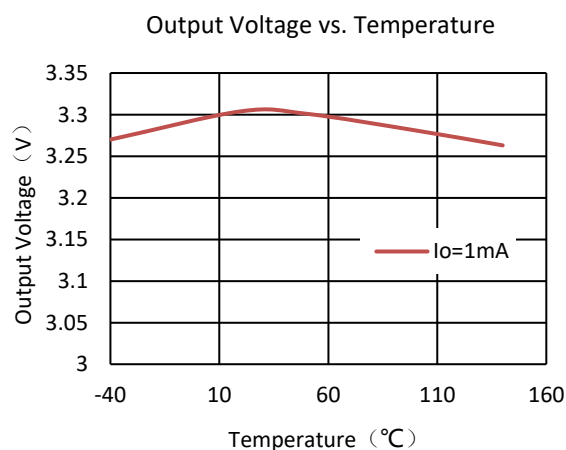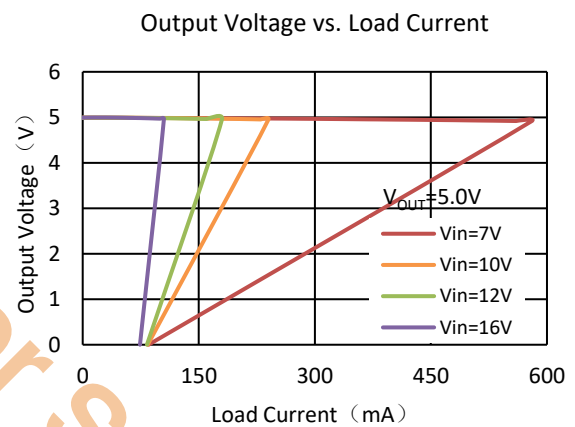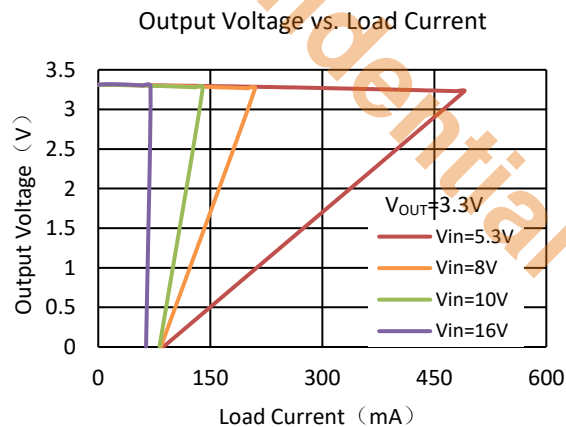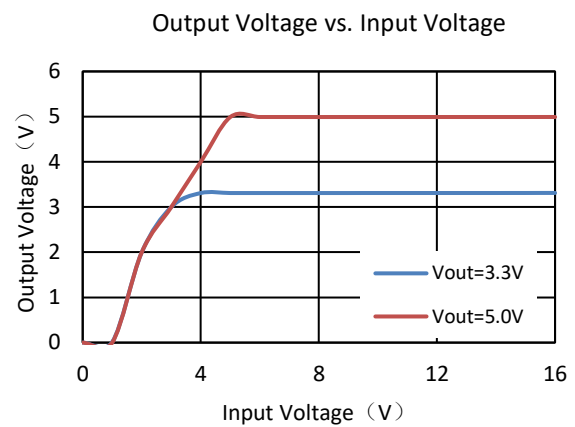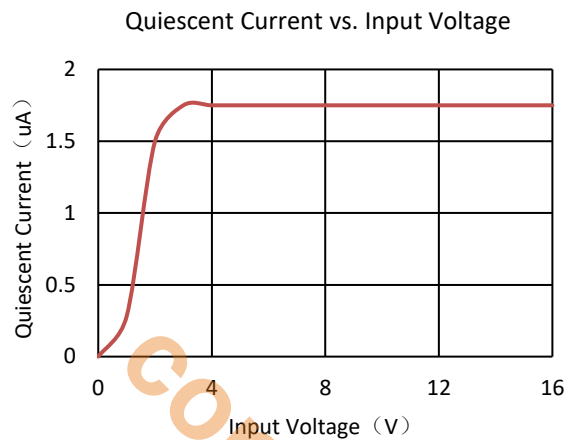

Power ON

CH1: V_{IN}





CH2: V_{OUT}

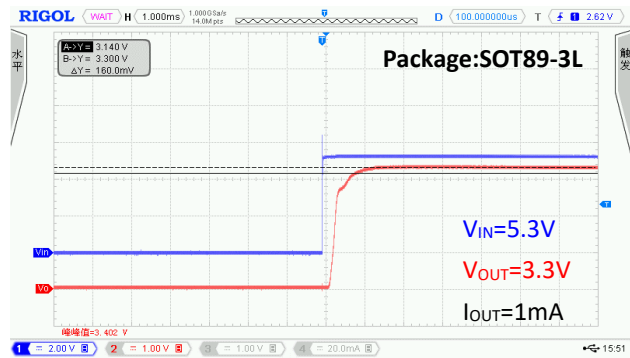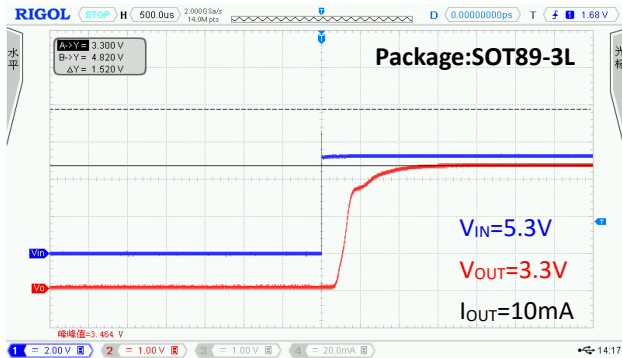

Line Transient

CH1: V_{IN}

CH2: V_{OUT}

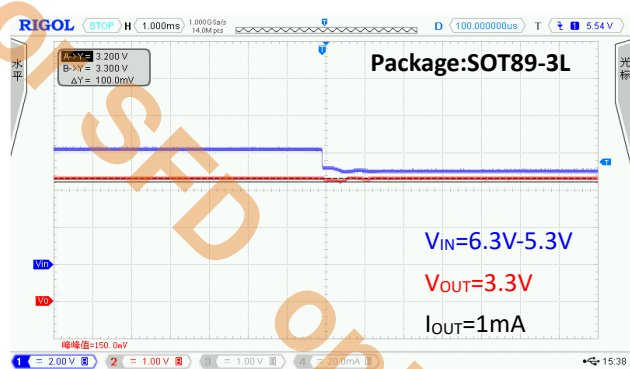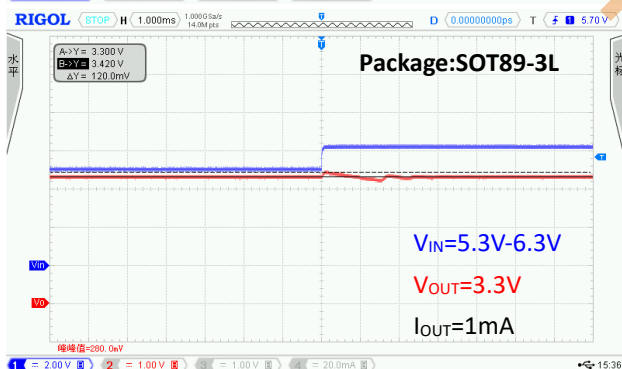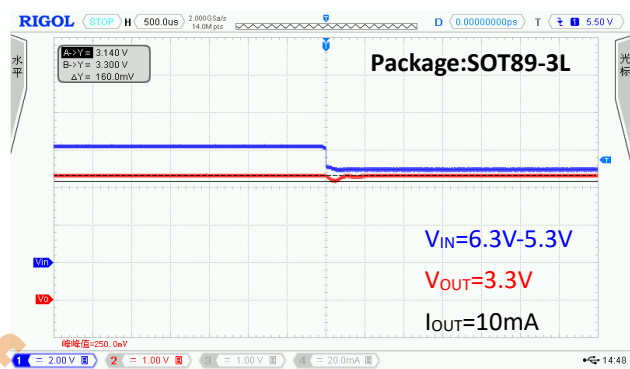
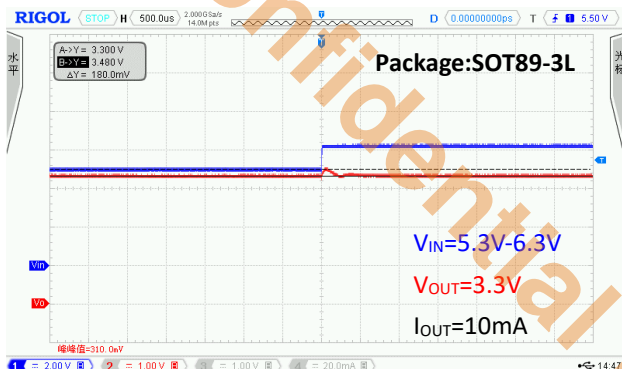


Load Transient


CH1: V_{IN}

CH2: V_{OUT}


CH4: I_{OUT}

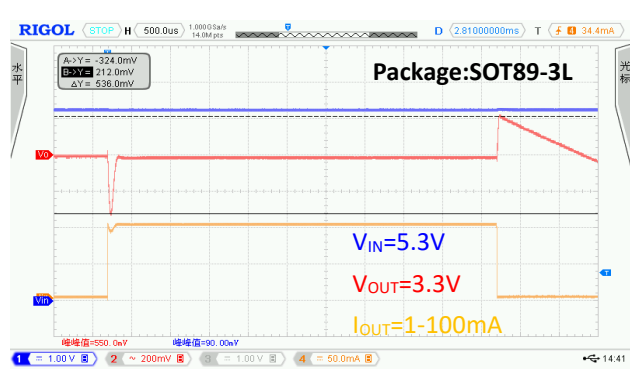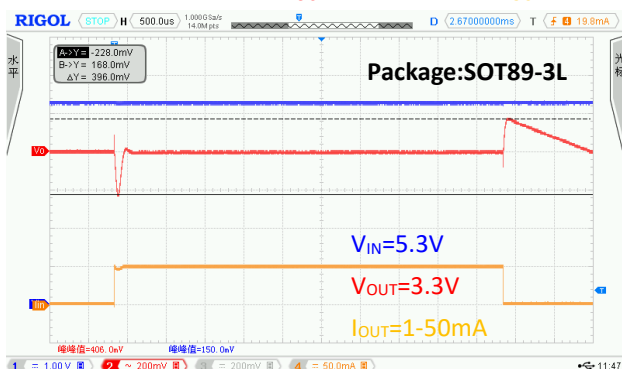

PACKAGE OUTLINE

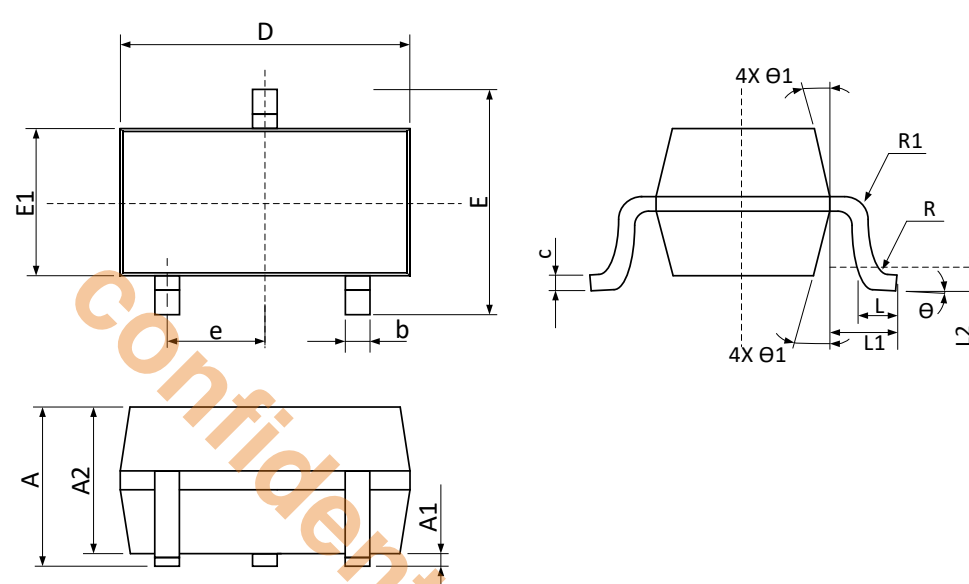Package	SOT23-3L	Devices per reel	3000Pcs	Unit	mm
Package Dimension:					
					
DIMENSIONS IN MILLIMETERS					
SYMBOL	MINIMUM	NOMINAL	MAXIMUM		
A	-	-	1.35		
A1	0.00	-	0.15		
A2	1.00	1.10	1.20		
b	0.35 REF				
c	0.1	-	0.2		
D	2.82	2.92	3.02		
E	2.60	2.80	3.00		
E1	1.50	1.60	1.726		
e	0.95 REF				
e1	1.90 REF				
L	0.30	0.45	0.60		
L1	0.60 REF				
L2	0.25 REF				
R	0.10	-	-		
R1	0.10	-	0.25		
Θ	0°	4°	8°		
Θ1	5°	10°	15°		

PACKAGE OUTLINE

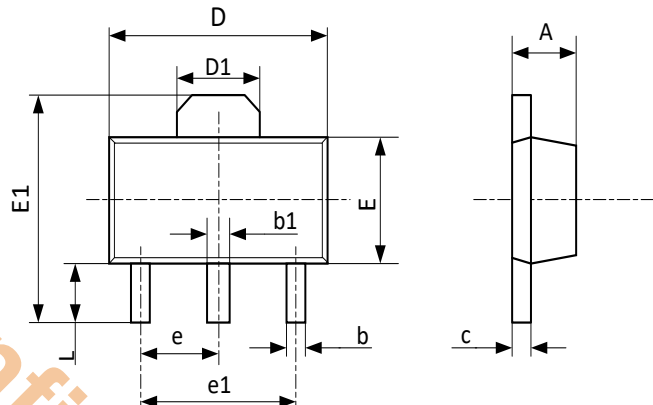Package	SOT89-3L	Devices per reel	1000Pcs	Unit	mm
Package Dimension:					
					
Symbol	Dimensions In Millimeters		Dimensions In Inches		
	Min	Max	Min	Max	
A	1.400	1.600	0.055	0.063	
b	0.350	0.520	0.013	0.197	
b1	0.400	0.580	0.016	0.023	
c	0.350	0.440	0.014	0.017	
D	4.400	4.600	0.173	0.181	
D1	1.550 REF		0.061 REF		
E	2.350	2.550	0.091	0.102	
E1	3.940	4.250	0.155	0.167	
e	1.500 TYP		0.060 TYP		
e1	3.000 TYP		0.118 TYP		
L	0.900	1.100	0.035	0.047	

Revision History

Version No.	Date	Description
Preliminary	2017-05-12	Initial preliminary release
Version 0.1	2017-12-15	-Update features -Update electrical characteristics -Update typical performance characteristics
Version 0.2	2018-01-15	-Update package description
Version 0.3	2018-01-23	-Update features description
Version 0.4	2018-03-02	-Add HP6215S3 product package
Version 1.0	2018-03-29	-Change HP6215T3B to HP6215T3 -Update marking description
Version 1.1	2018-05-16	-Update typical performance characteristics -Add OTP description
Version 1.2	2018-06-21	-Update electrical characteristics
Version 1.3	2018-06-22	-Update Part Number
Version 1.4	2018-10-31	-Add output voltage code table
Version 1.5	2019-12-02	Update marking description
Version 1.6	2021-05-20	-Update SOT23-3L/ SOT89-3L package