

# Lonten N-channel 650V, 40A, 0.099Ω LonFET™ Power MOSFET

## Description

LonFET™ Power MOSFET is fabricated using advanced super junction technology. The resulting device has extremely low on resistance, making it especially suitable for applications which require superior power density and outstanding efficiency.

## Features

- ◆ Ultra low  $R_{DS(on)}$
- ◆ Ultra low gate charge (typ.  $Q_g = 66\text{nC}$ )
- ◆ 100% UIS tested
- ◆ RoHS compliant

## Applications

- ◆ Power factor correction (PFC).
- ◆ Switched mode power supplies (SMPS).
- ◆ Uninterruptible power supply (UPS).

## Product Summary

$V_{DS} @ T_{j,max}$	700V
$R_{DS(on),max}$	0.099Ω
$I_{DM}$	120A
$Q_{g,typ}$	66nC




TO-247



TO-220MF



TO-263

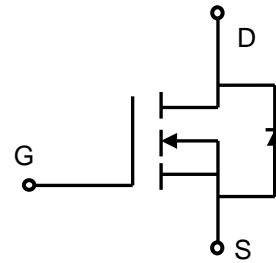

N-Channel MOSFET



## Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Drain-Source Voltage	$V_{DSS}$	650	V
Continuous drain current ( $T_C = 25^\circ\text{C}$ )	$I_D$	40	A
( $T_C = 100^\circ\text{C}$ )		26	A
Pulsed drain current <sup>1)</sup>	$I_{DM}$	120	A
Gate-Source voltage	$V_{GSS}$	$\pm 30$	V
Avalanche energy, single pulse <sup>2)</sup>	$E_{AS}$	1000	mJ
Power Dissipation TO-247 ( $T_C = 25^\circ\text{C}$ )	$P_D$	278	W
- Derate above $25^\circ\text{C}$		2.22	W/ $^\circ\text{C}$
Power Dissipation TO-220MF ( $T_C = 25^\circ\text{C}$ )		35	W
- Derate above $25^\circ\text{C}$		0.28	W/ $^\circ\text{C}$
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150	$^\circ\text{C}$
Continuous diode forward current	$I_S$	40	A
Diode pulse current	$I_{S,pulse}$	120	A

### Thermal Characteristics TO-247/TO-263

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	0.45	°C/W
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	62	°C/W
Soldering temperature, wavesoldering only allowed at leads. (1.6mm from case for 10s)	$T_{\text{sold}}$	260	°C

### Thermal Characteristics TO-220MF

Parameter	Symbol	Value	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	3.6	°C/W
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	62.5	°C/W
Soldering temperature, wavesoldering only allowed at leads. (1.6mm from case for 10s)	$T_{\text{sold}}$	260	°C

### Package Marking and Ordering Information

Device	Device Package	Marking	Units/Tube	Units/Real
LSB65R099GF	TO-247	LSB65R099GF	30	
LSD65R099GF	TO-220MF	LSD65R099GF	50	
LSE65R099GF	TO-263-2L	LSE65R099GF		800

### Electrical Characteristics

 $T_c = 25^\circ\text{C}$  unless otherwise noted

Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Unit
<b>Static characteristics</b>						
Drain-source breakdown voltage	$\text{BV}_{\text{DSS}}$	$V_{\text{GS}}=0 \text{ V}, I_{\text{D}}=0.25 \text{ mA}$	650	-	-	V
Gate threshold voltage	$V_{\text{GS(th)}}$	$V_{\text{DS}}=V_{\text{GS}}, I_{\text{D}}=0.25 \text{ mA}$	2.0	3.0	4.0	V
Drain cut-off current	$I_{\text{DSS}}$	$V_{\text{DS}}=650 \text{ V}, V_{\text{GS}}=0 \text{ V},$ $T_j = 25^\circ\text{C}$ $T_j = 125^\circ\text{C}$	-	-	1	$\mu\text{A}$
Gate leakage current, Forward	$I_{\text{GSSF}}$	$V_{\text{GS}}=30 \text{ V}, V_{\text{DS}}=0 \text{ V}$	-	-	100	nA
Gate leakage current, Reverse	$I_{\text{GSSR}}$	$V_{\text{GS}}=-30 \text{ V}, V_{\text{DS}}=0 \text{ V}$	-	-	-100	nA
Drain-source on-state resistance	$R_{\text{DS(on)}}$	$V_{\text{GS}}=10 \text{ V}, I_{\text{D}}=20 \text{ A}$ $T_j = 25^\circ\text{C}$ $T_j = 150^\circ\text{C}$	-	0.086	0.099	$\Omega$
Gate resistance	$R_{\text{G}}$	f=1 MHz, open drain	-	2.0	-	$\Omega$
<b>Dynamic characteristics</b>						
Input capacitance	$C_{\text{iss}}$	$V_{\text{DS}} = 25 \text{ V}, V_{\text{GS}} = 0 \text{ V},$ $f = 1 \text{ MHz}$	-	3000	-	pF
Output capacitance	$C_{\text{oss}}$		-	2500	-	
Reverse transfer capacitance	$C_{\text{rss}}$		-	10	-	
Turn-on delay time	$t_{\text{d(on)}}$	$V_{\text{DD}} = 400 \text{ V}, I_{\text{D}} = 20 \text{ A}$ $R_{\text{G}} = 10 \Omega, V_{\text{GS}}=10 \text{ V}$	-	31.2	-	ns
Rise time	$t_r$		-	43.8	-	
Turn-off delay time	$t_{\text{d(off)}}$		-	151.4	-	
Fall time	$t_f$		-	12.3	-	
<b>Gate charge characteristics</b>						

Gate to source charge	$Q_{gs}$	$V_{DD}=400\text{ V}, I_D=20\text{ A},$ $V_{GS}=0\text{ to }10\text{ V}$	-	17.8	-	nC
Gate to drain charge	$Q_{gd}$		-	25	-	
Gate charge total	$Q_g$		-	66	-	
Gate plateau voltage	$V_{plateau}$		-	6.0	-	V
<b>Reverse diode characteristics</b>						
Diode forward voltage	$V_{SD}$	$V_{GS}=0\text{ V}, I_F=20\text{ A}$	-	-	1.2	V
Reverse recovery time	$t_{rr}$	$V_R=50\text{ V}, I_F=20\text{ A},$ $dI_F/dt=100\text{ A}/\mu\text{s}$	-	198	-	ns
Reverse recovery charge	$Q_{rr}$		-	3.1	-	$\mu\text{C}$
Peak reverse recovery current	$I_{rrm}$		-	14.9	-	A

Notes:

1. Limited by maximum junction temperature, maximum duty cycle is 0.75.
2.  $I_{AS} = 8\text{A}$ ,  $V_{DD} = 60\text{V}$ , Starting  $T_j = 25^\circ\text{C}$ .

## Electrical Characteristics Diagrams

Figure 1. On-Region Characteristics

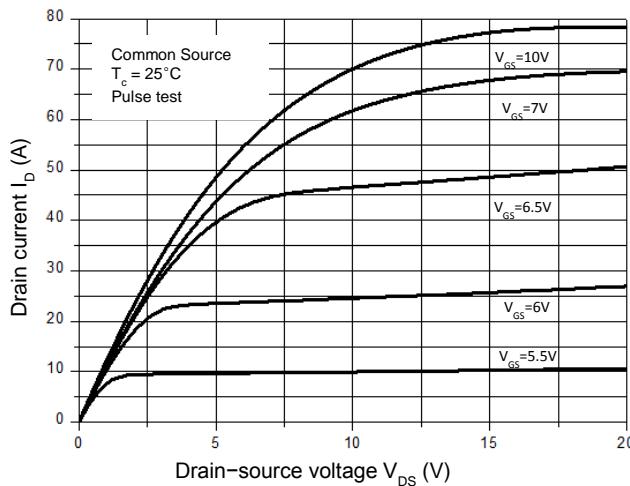


Figure 2. Transfer Characteristics

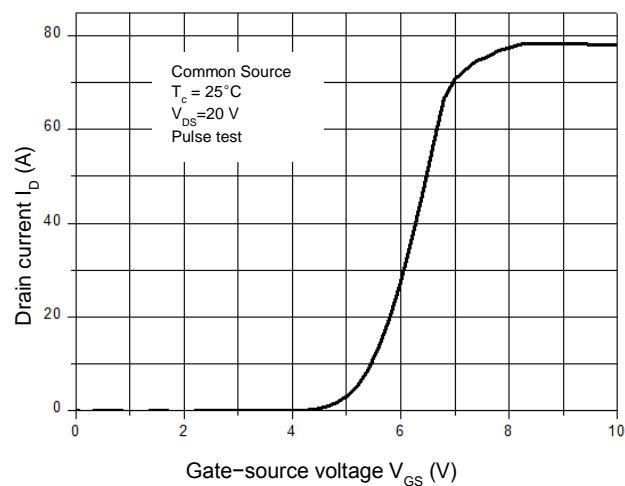


Figure 3. On-Resistance Variation vs. Drain Current

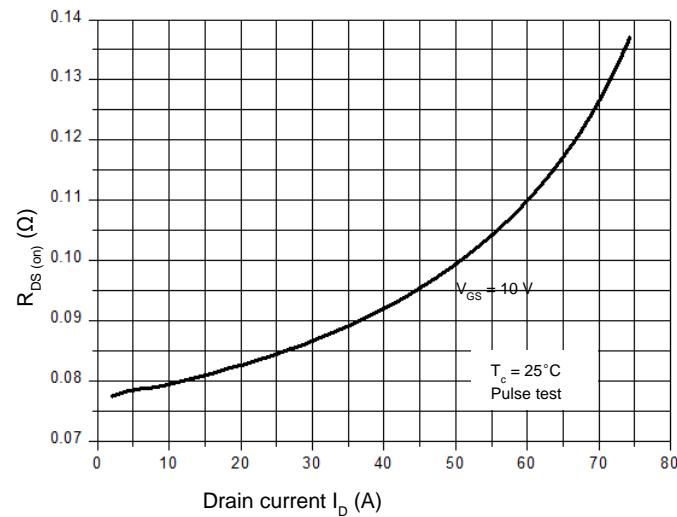


Figure 4. Threshold Voltage vs. Temperature

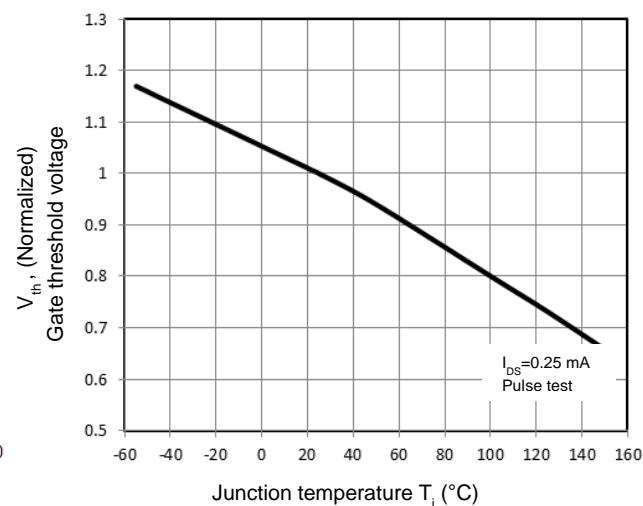


Figure 5. Breakdown Voltage vs. Temperature

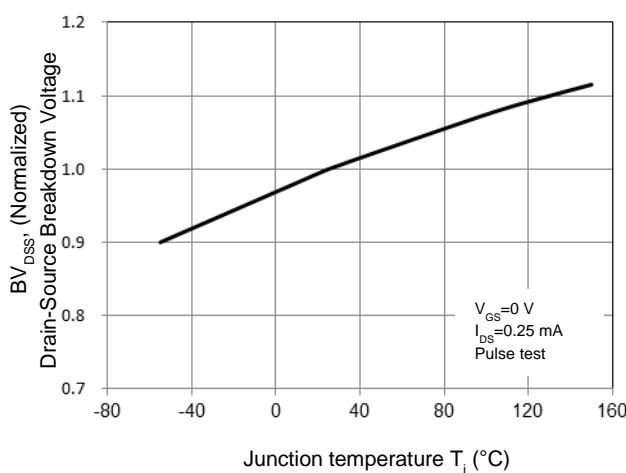


Figure 6. On-Resistance vs. Temperature

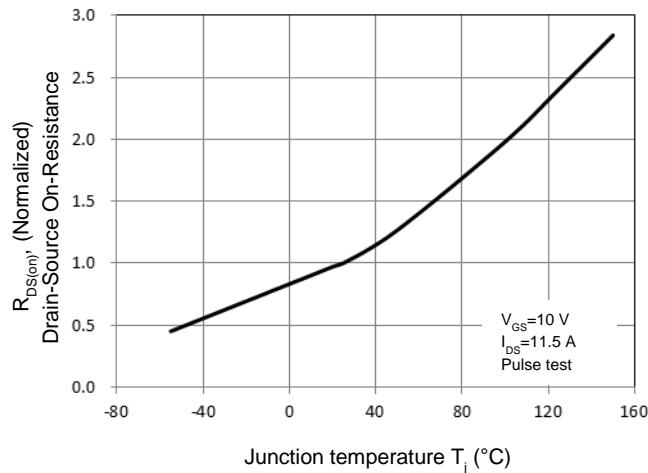


Figure 7. Capacitance Characteristics

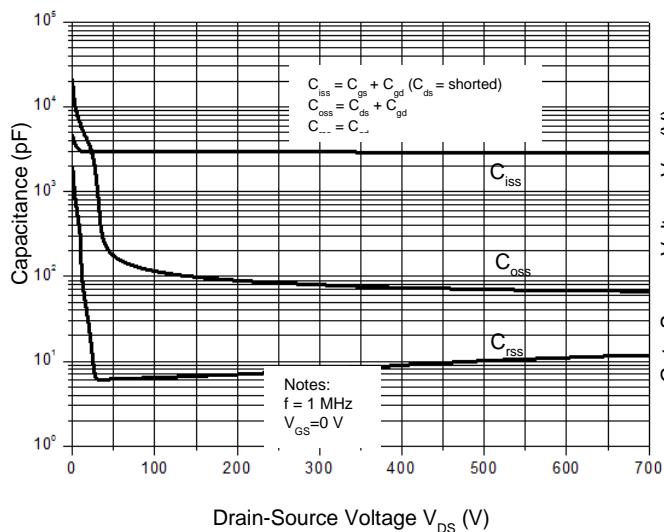


Figure 9.1 Maximum Safe Operating Area

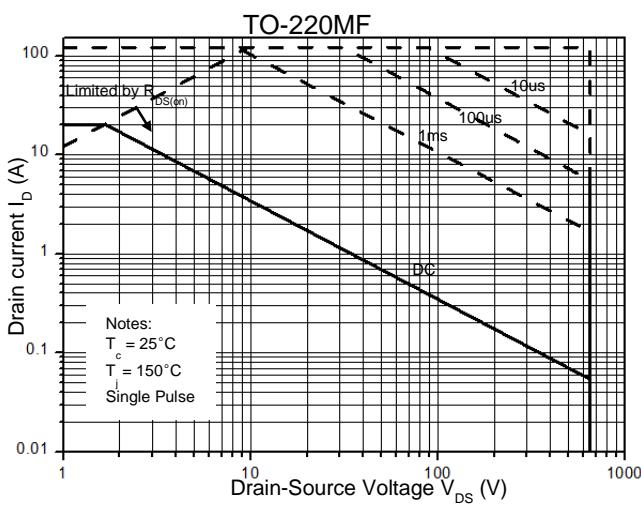


Figure 10.1 Power Dissipation vs. Temperature

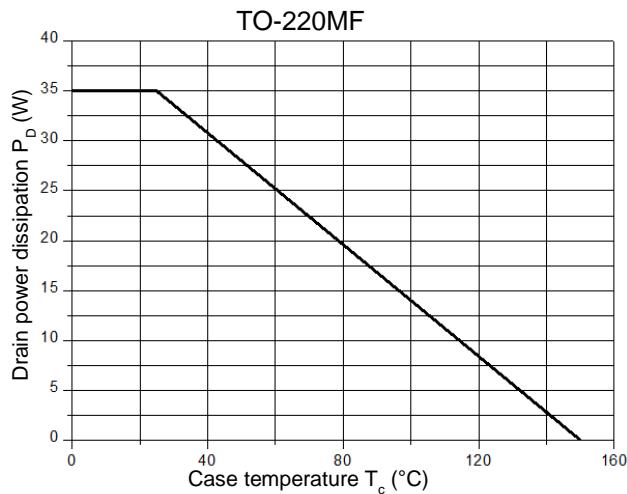


Figure 8. Gate Charge Characterist

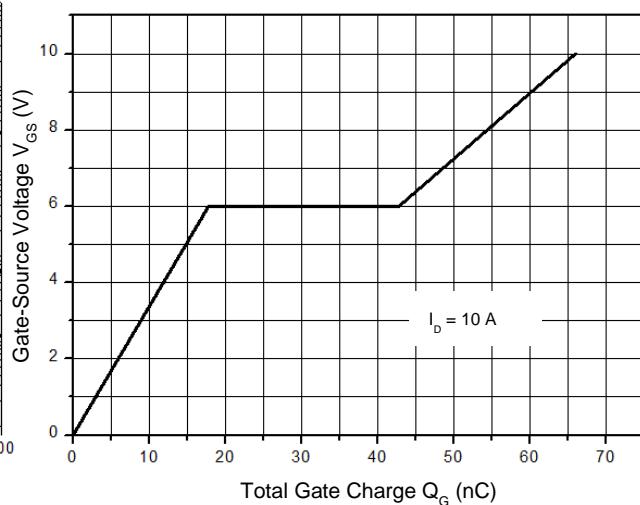


Figure 9.2 Maximum Safe Operating Area






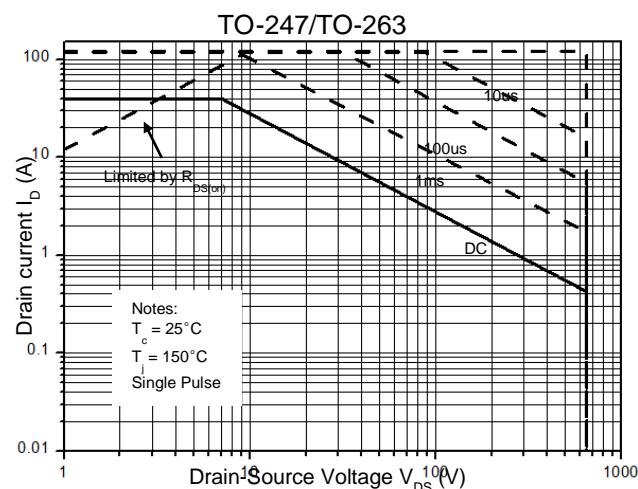




Figure 10.2 Power Dissipation vs. Temperature

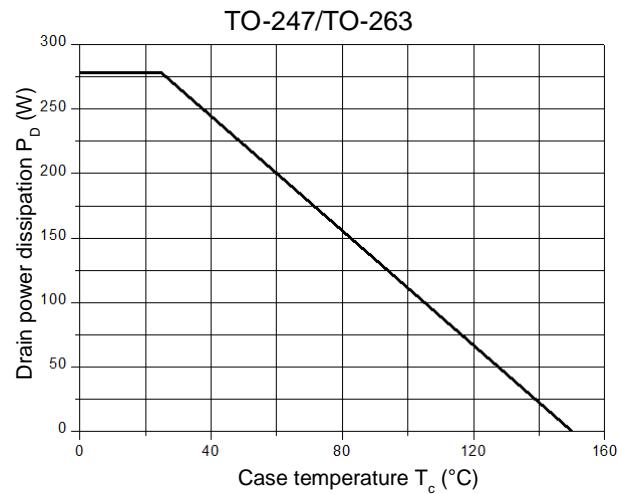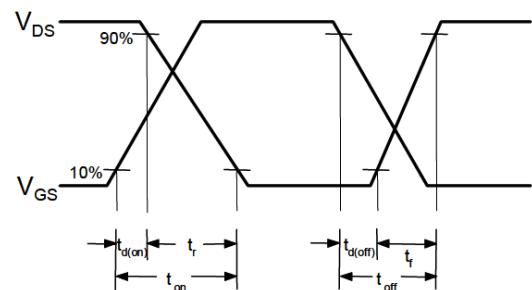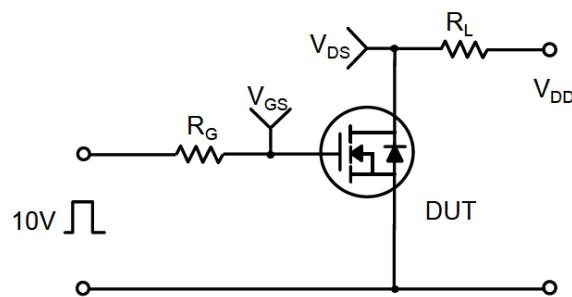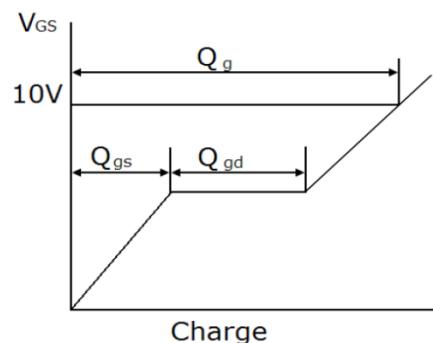


### Gate Charge Test Circuit & Waveform

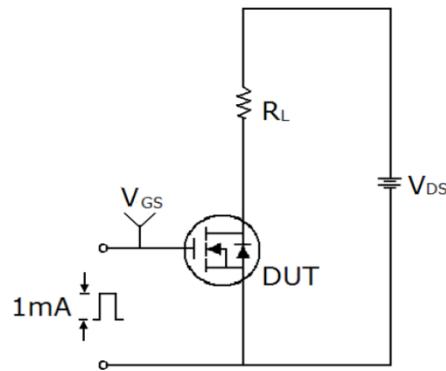

### Unclamped Inductive Switching Test Circuit & Waveforms

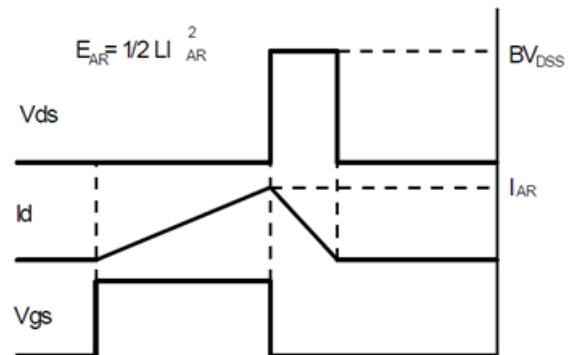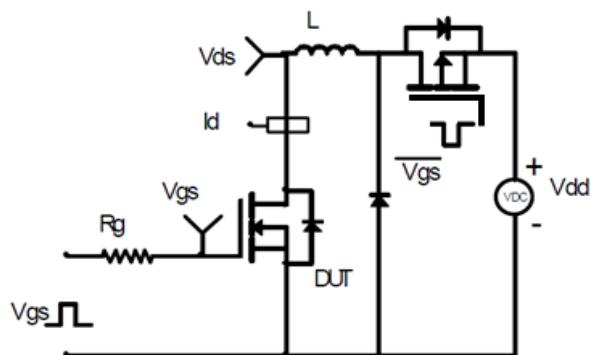


### Mechanical Dimensions for TO-247

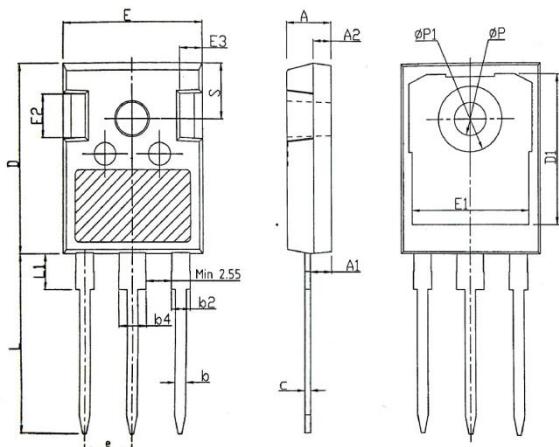


SYMBOL	mm		
	MIN	NOM	MAX
A	4.80	5.00	5.20
A1	2.21	2.41	2.59
A2	1.85	2.00	2.15
b	1.11	1.21	1.36
b2	1.91	2.01	2.21
b4	2.91	3.01	3.21
c	0.51	0.61	0.75
D	20.80	21.00	21.30
D1	16.25	16.55	16.85
E	15.50	15.80	16.10
E1	13.00	13.30	13.60
E2	4.80	5.00	5.20
E3	2.30	2.50	2.70
e	5.44BSC		
L	19.82	19.92	20.22
L1	—	—	4.30
ØP	3.40	3.60	3.80
ØP1	—	—	7.30
S	6.15BSC		

### TO-247 Part Marking Information

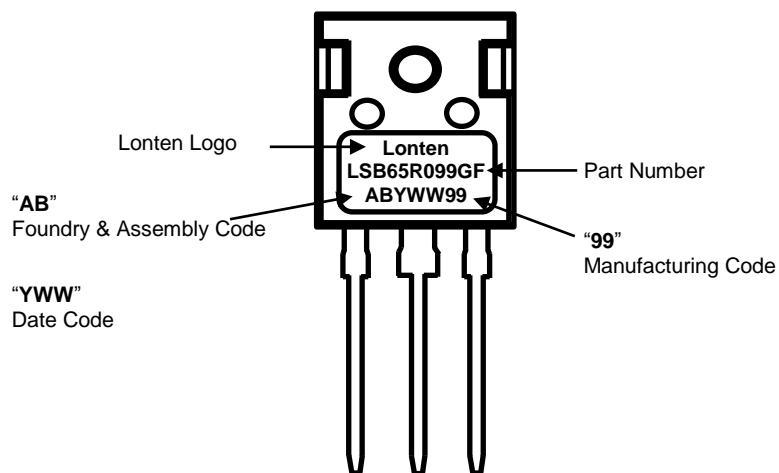


### Mechanical Dimensions for TO-220MF

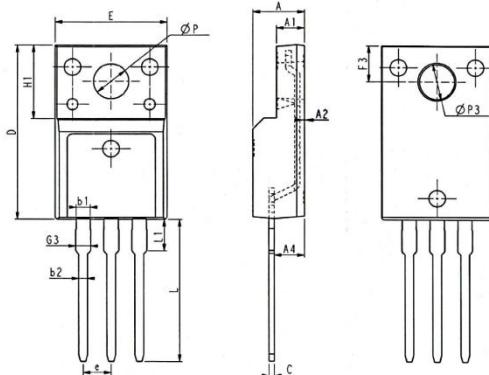


SYMBOL	COMMON DIMENSIONS					
	MM			INCH		
	MIN	NOM	MAX	MIN	NOM	MAX
E	9.96	10.16	10.36	0.392	0.400	0.408
A	4.50	4.70	4.90	0.177	0.185	0.193
A1	2.34	2.54	2.74	0.092	0.100	0.108
A2	0.30	0.45	0.60	0.012	0.002	0.024
A4	2.65	2.76	2.96	0.104	0.109	0.117
C	0.40	0.50	0.65	0.016	0.020	0.026
D	15.57	15.87	16.17	0.613	0.625	0.637
H1	6.70REF			0.264REF		
e	2.54BSC			0.1BSC		
ØP	3.03	3.18	3.38	0.119	0.125	0.133
L	12.68	12.98	13.28	0.499	0.511	0.523
L1	2.88	3.03	3.18	0.113	0.119	0.125
ØP3	3.15REF			0.124REF		
F3	3.15	3.30	3.45	0.124	0.130	0.136
G3	1.25	1.35	1.55	0.049	0.053	0.061
b1	1.18	1.28	1.43	0.046	0.050	0.056
b2	0.70	0.80	0.95	0.028	0.031	0.037

### TO-220MF Part Marking Information

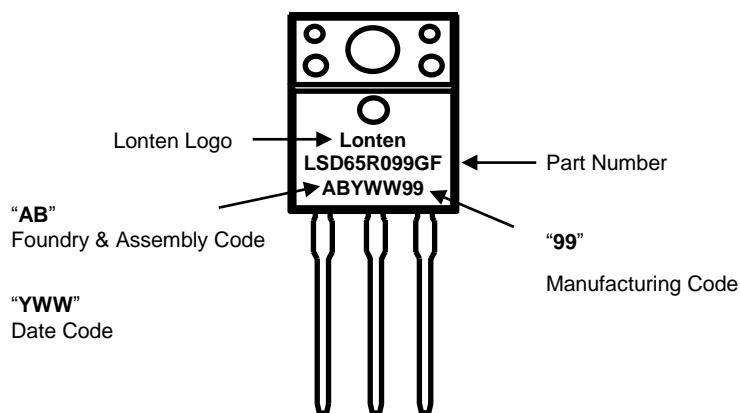


### Mechanical Dimensions for TO-263

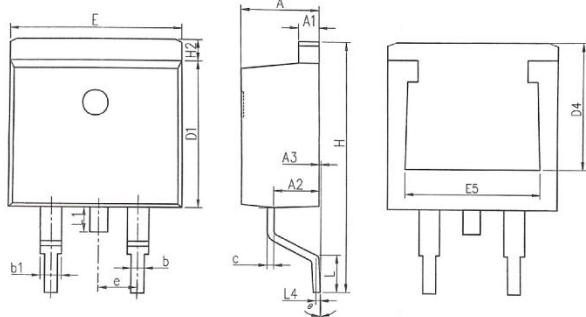

SYMBOL	COMMON DIMENSIONS					
	MM			INCH		
	MIN	NOM	MAX	MIN	NOM	MAX
A	4.37	4.57	4.77	0.172	0.180	0.188
A1	1.22	1.27	1.42	0.048	0.050	0.056
A2	2.49	2.89	2.89	0.098	0.114	0.114
A3	0.00	0.13	0.25	0.000	0.005	0.010
b	0.70	0.81	0.96	0.028	0.032	0.034
b1	1.17	1.27	1.47	0.046	0.050	0.058
c	0.30	0.38	0.53	0.012	0.015	0.021
D1	8.50	8.70	8.90	0.335	0.343	0.350
D4	6.60	—	—	0.260	—	—
E	9.86	10.16	10.36	0.389	0.400	0.408
E5	7.06	—	—	0.278	—	—
e	2.54 BSC			0.100 BSC		
H	14.70	15.10	15.50	0.579	0.594	0.610
H2	1.07	1.27	1.47	0.042	0.050	0.058
L	2.00	2.30	2.60	0.079	0.091	0.102
L1	1.40	1.55	1.70	0.055	0.061	0.067
L4	0.25 BSC			0.010 BSC		
θ	0°	5°	9°	0°	0.197°	0.354°

### TO-263 Part Marking Information

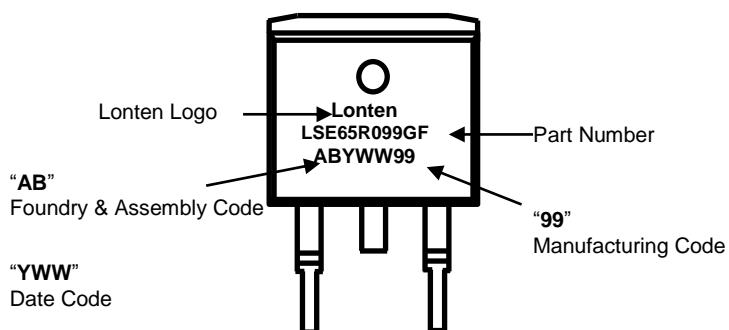

## Disclaimer

The content specified herein is for the purpose of introducing LONTEN's products (hereinafter "Products"). The information given in this document shall in no event be regarded as a guarantee of conditions or characteristics. Examples of application circuits, circuit constants and any other information contained herein illustrate the standard usage and operations of the Products. The peripheral conditions must be taken into account when designing circuits for mass production.

LONTEN does not assume any liability for infringement of patents, copyrights, or other intellectual property rights of third parties by or arising from the use of the Products or technical information described in this document.

The Products are not designed or manufactured to be used with any equipment, device or system which requires an extremely high level of reliability the failure or malfunction of which may result in a direct threat to human life or create a risk of human injury (such as a medical instrument, transportation equipment, aerospace machinery, nuclear-reactor controller, fuel-controller or other safety device). LONTEN shall bear no responsibility in any way for use of any of the Products for the above special purposes.

Although LONTEN endeavors to improve the quality and reliability of its products, semiconductor products have specific characteristics such as the occurrence of failure at a certain rate and malfunctions under certain use conditions. Please be sure to implement safety measures to guard them against the possibility of physical injury, and injury or damage caused by fire in the event of the failure of a LONTEN product.

The content specified herein is subject to change for improvement without notice. When using a LONTEN product, be sure to obtain the latest specifications.

Dec. 2017 Revision 2.0